

# OCTOPUS™



## “S” Series Automatic Rotary Ring Stretch Wrapper

- **High Speed Operation  
Increases Throughput**

Wraps up to 130 loads  
per hour depending on  
load size and wrap pattern

- **Robust Construction  
Minimizes  
Maintenance**

Heavy duty steel frame  
structure along with  
a well balanced ring  
and belted lifting device  
results in quiet, efficient  
performance and  
minimal maintenance



*Shown with optional scissor type load  
stabilizer and integral top sheet dispenser*

- **Simple Installation  
Saves Time, Money  
and Space**

Requires minimal  
assembly and less floor  
space compared to most  
other styles of wrappers

- **Extremely Versatile  
Modular Design  
to Meet Changing  
Demands**

Accommodates a  
wide range of pallet  
load sizes and is  
offered with numerous  
innovative options

- **Film Savings and  
Unmatched Flexibility**

Advanced **Easy S**  
film carriage ensures  
a higher, more consistent  
pre-stretch while the  
ring design allows for  
unlimited wrap patterns  
and reduced film usage

The unique and original Octopus ring wrapper has been upgraded to incorporate the latest technology. It is fast, efficient and versatile.

# OCTOPUS™

The Octopus "S" models: 1835S, 1845S, 1850S, 2340S

## Octopus features


- High wrapping speed offering high capacity
- Unique, positive film tail heat sealing method
- **Easy S** film carriage design offers unmatched performance

The **OCTOPUS** steel frame version is a fully automatic pallet wrapping machine incorporating the latest technology and the famous **OCTOPUS** ring type method. The wrapping film reel is suspended from a ring and it revolves around the pallet. The ring is raised and lowered according to the wrapping program. The pallet remains stationary, which makes the wrapping of unstable and "lightweight" products considerably easier. There are no centrifugal forces to cause stress or strain on the load or on the equipment. As the ring can be accurately positioned in the vertical direction, wrapping can be started and finished at any height required. The **OCTOPUS** provides optimal load containment while minimizing film usage.



This unique, easy load film carriage design provides all of the benefits of an "S" wrap while still being very user friendly. Compared to traditional "W" wrap systems, the positive contact of the "S" wrap pattern improves pre-stretch levels, can better handle a variety of films, reduces wear and significantly lowers the overall cost of ownership. Coupled with the innovative ability to vary film force throughout the wrap cycle, this Octopus is the world's best stretch wrapper.


Positive contact "S" wrap design




*It can accommodate a wide range of pallet load sizes and produces a heat seal finish (with no tail) of the highest quality. The Octopus is silent in operation and easily maintained. This versatile machine is modular in design, allowing for numerous innovative options to help solve your specific stretch packaging challenges.*

## Options

- **Load stabilizer** ensures unstable loads remain intact throughout the wrapping operation.
- **Integrated top sheet dispenser** provides automatic weather proofing without taking up floor space.
- **Reel Change Device (RCS)** time and labor saving system which automatically changes the reels of stretch film without manual intervention.
- **Corner Post Device (CPD)** cost saving system that automatically inserts 4 solid corner posts at the pallet corners.
- **LogoWrap™ System** automatically inserts printed stretch film to a pallet load during the normal wrapping cycle to provide affordable 4-sided brand identification.
- **OctoMax™** performance monitoring system reduces film costs, eliminates downtime and simplifies maintenance.
- **And many more . . .**

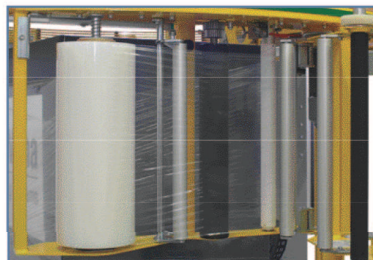

**1. The patented Easy S film carriage** with easy load feature ensures quick change over and reduces down time. The carriage also features a very efficient power pre-stretch film system.

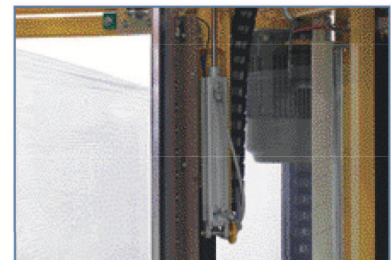

**2. No Touch-No Tail (NT2)** - The counter plate heat sealing device with maintenance free film cutting element ensures that the film is consistently sealed with no tail to provide a perfectly finished wrap.