

RAPTOR® PLUS



RAPTOR PLUS

Economical semi-automatic turntable wrapping machines are reliable, safe and easy to use.



Efficiency

- Motorized Power Pre Stretch System (230%)
- Adjustable film-tension control
- All types of machine grade films can be used
- Minimum consumption of film per pallet
- Optimization of cost per pallet


Safety

- Film carriage inside the tower
- Safe, fast and ergonomic film loading
- Safety switch for film loading door
- Emergency stop




Simplicity

- Fast and simple installation
- Safe transportation (machine packed in a wooden crate)
- Easy maintenance
- Height sensing by photocell (wrapping of dark colored goods also possible)
- Easy film feeding – the film is just placed in the middle of the carriage and threaded through the threading slot

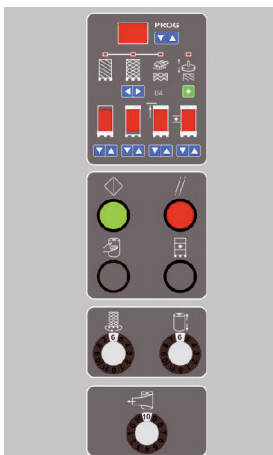

Easy to use

- Adjustable number of top and bottom wraps
- Adjustable carriage and turntable speed
- Reinforcing wrap function
- Soft START/STOP
- Load begins and ends in same position
- Stores 15 easily adjustable programs
- Adjustable overwrap

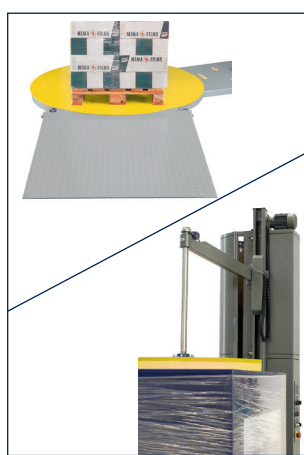

Options

- Access ramp
- Load stabilizer
- Turntable diameter 79"
- Weight scale

Technical data

Capacity

Up to 35 pallets/hr
(depending on pallet dimensions)

Power supply

120V, single phase, 60Hz

Turntable speed

2-12 rpm

Turntable height

3 1/4"

Film carriage

variable up/down speed

Machine dimensions:

Turntable Ø:

65"

Space required:

45.6 ft² (height 114")

Machine weight:

1014 lbs.

Wrapping height:

94"

Max. pallet weight:

4,400 lbs.

Pallet dimensions:

65"L x 65"W x 94"H (max)

